


单向阀


KDXFD-1C/KDXFD-1D

/ Dimension

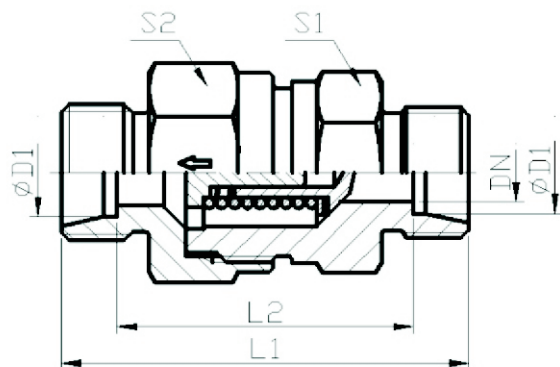

24° 锥/24° 锥
24° CONE/24° CONE

/I nstallation

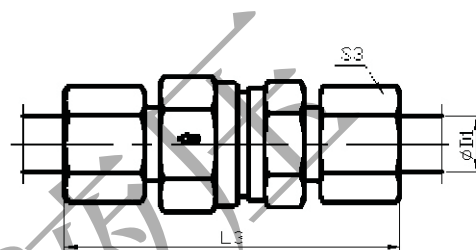

订货型号 OrderCode

系列 SERIES	代号 PARTNO.	D1	DN	L1	L2	L3	S1	S2	S3	重量(g) WEIGHT	工作压力 WORKING PRESSURE(bar)
L	KDXFD-1C-12	06	3.5	43	29	58	17	17	14	46	400
	KDXFD-1C-14	08	3.5	44	30	59	19	19	17	61	400
	KDXFD-1C-16	10	7.5	55	40.5	69.5	22	24	19	104	400
	KDXFD-1C-18	12	9.5	58	43.5	72.5	27	30	22	166	400
	KDXFD-1C-22	15	11	62	47.5	77.5	27	32	27	192	400
	KDXFD-1C-26	18	14	67	51.5	83.5	36	41	32	292	400
	KDXFD-1C-30	22	18	77	61.5	93.5	41	46	36	472	250
	KDXFD-1C-36	28	23	85	69.5	102.5	50	55	41	746	250
	KDXFD-1C-45	35	29	96	74.5	117.5	60	65	50	1062	250
	KDXFD-1C-52	42	29	96	74	119	65	70	60	1518	250
S	KDXFD-1D-14	06	3.5	48.5	34.5	63.5	19	19	17	70	420
	KDXFD-1D-16	08	3.5	48.5	34.5	63.5	19	19	19	74	420
	KDXFD-1D-18	10	5.5	55.5	40.5	72.5	22	24	22	121	420
	KDXFD-1D-20	12	7.5	57.5	42.5	74.5	24	27	24	148	420
	KDXFD-1D-22	14	9.5	64	47.5	82.5	27	32	27	218	420
	KDXFD-1D-24	16	11	68	50.5	86.5	32	36	30	286	420
	KDXFD-1D-30	20	15	76	54.5	97.5	41	50	36	506	420
	KDXFD-1D-36	25	19	83	58.5	106.5	46	55	46	639	420
	KDXFD-1D-42	30	24	97	69.5	122.5	60	60	50	1157	250
	KDXFD-1D-52	38	29	108	75.5	136.5	65	70	60	1650	250

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如KDXFD-1C-30/RN。

Note: In case if you are interested to order the head adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part NO, for example KDXFD-1C-30/RN.


注释/ANNOTATIONS

可根据客户要求设计符合要求的各种非标阀 Special design and development are available

单向阀


KDXFV-1CB-WD/KDXFV-1DB-WD

/ Dimension

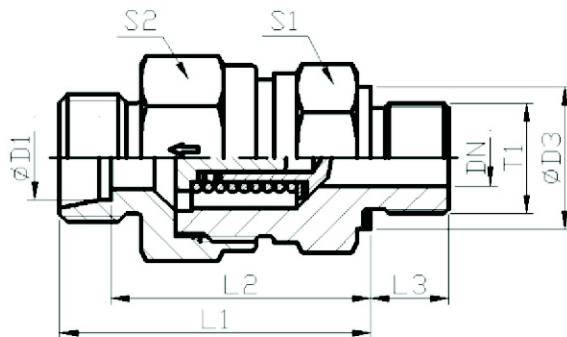

英制外螺纹-ED密封 BSPPMALE-EDSEAL
EO24° 锥/英制外螺纹BSPP-ED密封
24° CONE/BSPPMALE-EDSEAL (ISO1179)

/I nstallation

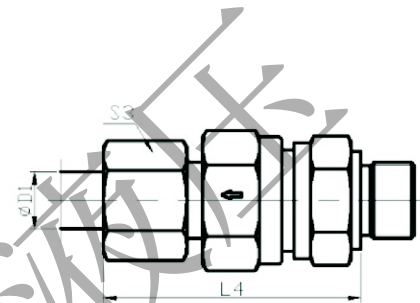

订货型号 OrderCode

系列 SERIES	代号 PARTNO.	D1	DN	T1	D3	L1	L2	L3	L4	S1	S2	S3	重量(g) WEIGHT	工作压力 WORKING PRESSURE (bar)
L	KDXFV-1CB-12-02WD	06	3.5	G1/8"X28	14	35	28	8	42.5	17	17	14	47	400
	KDXFV-1CB-14-04WD	08	3.5	G1/4"X19	19	37	30	12	44.5	19	19	17	62	400
	KDXFV-1CB-16-04WD	10	7.5	G1/4"X19	19	46	38.5	12	53	22	24	19	105	400
	KDXFV-1CB-18-06WD	12	9.5	G3/8"X19	22	50	42.5	12	57	27	30	22	175	400
	KDXFV-1CB-22-08WD	15	11	G1/2"X14	27	53	45.5	14	60.5	27	32	27	205	400
	KDXFV-1CB-26-08WD	18	14	G1/2"X14	27	58	50	14	66	36	41	32	294	400
	KDXFV-1CB-30-12WD	22	18	G3/4"X14	32	63	55	16	71	41	46	36	450	250
	KDXFV-1CB-36-16WD	28	23	G1"X11	40	71	63	18	79.5	50	55	41	720	250
	KDXFV-1CB-45-20WD	35	29	G1.1/4"X11	50	80	69	20	90.5	60	65	50	1050	250
	KDXFV-1CB-52-24WD	42	29	G1.1/2"X11	55	80	68.5	22	91	65	70	60	1560	250
S	KDXFV-1DB-14-04WD	06	3.5	G1/4"X19	19	38.5	31.5	12	46	19	19	17	73	420
	KDXFV-1DB-16-04WD	08	3.5	G1/4"X19	19	38.5	31.5	12	46	19	19	19	79	420
	KDXFV-1DB-18-06WD	10	5.5	G3/8"X19	22	45.5	38	12	54	22	24	22	132	420
	KDXFV-1DB-20-06WD	12	7.5	G3/8"X19	22	48.5	41	12	57	24	27	24	153	420
	KDXFV-1DB-22-08WD	14	9.5	G1/2"X14	27	53	44.5	14	62	27	32	27	230	420
	KDXFV-1DB-24-08WD	16	11	G1/2"X14	27	57	48	14	66	32	36	30	293	420
	KDXFV-1DB-30-12WD	20	15	G3/4"X14	32	63	52	16	73.5	41	50	36	511	420
	KDXFV-1DB-36-16WD	25	19	G1"X11	40	-	54.5	18	78.5	46	55	46	648	420
	KDXFV-1DB-42-20WD	30	24	G1.1/4"X11	50	78	64	20	90.5	60	60	50	1176	250
	KDXFV-1DB-52-24WD	38	29	G1.1/2"X11	55	86	69.5	22	100	65	70	60	1624	250

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如KDXFV-1CB-30-12WD/RN。

Note: In case if you are interested to order the head adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part NO, for example KDXFV-1CB-30-12WD/RN.


注释/ANNOTATIONS

可根据客户要求设计符合要求的各种非标阀 Special design and development are available

单向阀

KDXFZ-1CB-WD/KDXFV-1DB-WD


/ Dimension

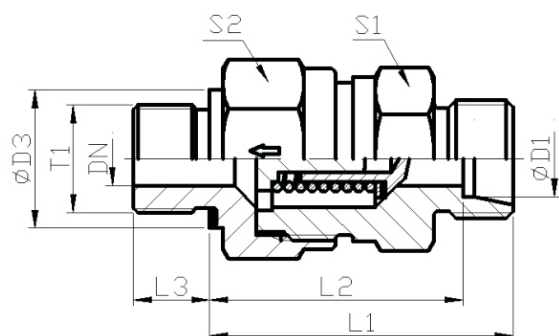

英制螺纹-ED密封 BSPPMALE-EDSEAL

英制外螺纹BSPP-ED密封 (ISO1179) / EO24° 锥
BSPPMALE-EDSEAL (ISO1179) / 24° CONE

/I nstallation

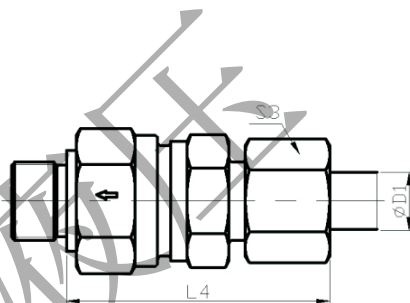

订货型号 OrderCode

系列 SERIES	代号 PARTNO.	D1	DN	T1	D3	L1	L2	L3	L4	S1	S2	S3	重量(g) WEIGHT	工作压力 WORKING PRESSURE (bar)
L	KDXFZ-1CB-12-02WD	06	3.5	G1/8" X28	14	33.5	26.5	8	41	17	17	14	44	400
	KDXFZ-1CB-14-04WD	08	5.5	G1/4" X19	19	35.5	28.5	12	43	19	19	17	59	400
	KDXFZ-1CB-16-04WD	10	7.5	G1/4" X19	19	46	38.5	12	53	22	24	19	125	400
	KDXFZ-1CB-18-06WD	12	9.5	G3/8" X19	22	48	40.5	12	55	27	30	22	161	400
	KDXFZ-1CB-22-08WD	15	11	G1/2" X14	27	50	42.5	14	57.5	27	32	27	186	400
	KDXFZ-1CB-26-08WD	18	14	G1/2" X14	27	56	48	14	64	36	41	32	275	400
	KDXFZ-1CB-30-12WD	22	18	G3/4" X14	32	64	56	16	72	41	46	36	463	250
	KDXFZ-1CB-36-16WD	28	23	G1" X11	40	72	64	18	80.5	50	55	41	721	250
	KDXFZ-1CB-45-20WD	35	29	G1.1/4" X11	50	81	70	20	91.5	60	65	50	1073	250
	KDXFZ-1CB-52-24WD	42	29	G1.1/2" X11	55	82	70.5	22	93	65	70	60	1602	250
S	KDXFZ-1DB-14-04WD	06	3.5	G1/4" X19	19	38.5	31.5	12	46	19	19	19	74	420
	KDXFZ-1DB-16-04WD	08	5.5	G1/4" X19	19	38.5	31.5	12	46	19	19	19	74	420
	KDXFZ-1DB-18-06WD	10	7.5	G3/8" X19	22	45.5	38	12	54	22	24	22	128	420
	KDXFZ-1DB-20-06WD	12	9.5	G3/8" X19	22	48.5	41	12	57	24	27	24	152	420
	KDXFZ-1DB-22-08WD	14	11	G1/2" X14	27	52	43.5	14	61	27	32	27	223	420
	KDXFZ-1DB-24-08WD	16	14	G1/2" X14	27	55	46	14	64	32	36	30	275	420
	KDXFZ-1DB-30-12WD	20	18	G3/4" X14	32	61	50	16	71.5	41	50	36	490	420
	KDXFZ-1DB-36-16WD	25	23	G1" X11	40	67	54.5	18	78.5	50	55	46	647	420
	KDXFZ-1DB-42-20WD	30	29	G1.1/4" X11	50	78	64	20	90.5	55	60	50	1180	250
	KDXFZ-1DB-52-24WD	38	29	G1.1/2" X11	55	88	71.5	22	102	65	70	60	1670	250

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如KDXFZ-1CB-30-12WD/RN。
Note: In case if you are interested to order the head adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part NO, for example KDXFZ-1CB-30-12WD/RN.


注释/ANNOTATIONS

可根据客户需要设计符合要求的各种非标阀 Special design and development are available

单向阀

KDXFV-1CM-WD/KDXFV-1DM-WD

/ Dimension

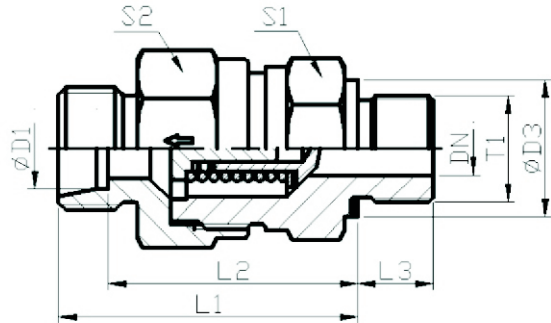


公制外螺纹-ED密封METRICMALE-EDSEAL

EO24° 锥/公制外螺纹-ED密封 (ISO997)

24° CONE/METRICMALE-EDSEAL (ISO997)

/I nstallation

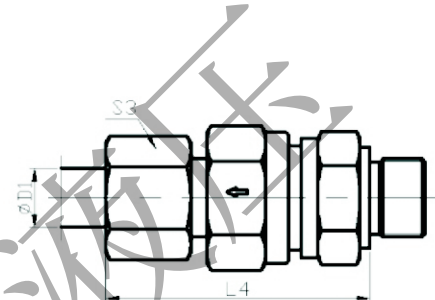

订货型号 OrderCode

系列 SERIES	代号 PARTNO.	D1	DN	T1	D3	L1	L2	L3	L4	S1	S2	S3	重量(g) WEIGHT	工作压力 WORKING PRESSURE (bar)
L	KDXFV-1CM-12-10WD	06	3.5	M10x1	14	35	28	8	42.5	17	17	14	46	400
	KDXFV-1CM-14-12WD	08	3.5	M12x1.5	17	36	29	12	43.5	19	19	17	58	400
	KDXFV-1CM-16-14WD	10	7.5	M14x1.5	19	45.5	38.5	12	53	22	24	19	108	400
	KDXFV-1CM-18-16WD	12	9.5	M16x1.5	22	49.5	42.5	12	57	27	30	22	173	400
	KDXFV-1CM-22-18WD	15	11	M18x1.5	24	52.5	45.5	12	60.5	27	32	27	192	400
	KDXFV-1CM-26-22WD	18	14	M22x1.5	27	56	50	14	66	36	41	32	298	400
	KDXFV-1CM-30-26WD	22	18	M26x1.5	32	64	55	16	71	41	46	36	446	250
	KDXFV-1CM-36-33WD	28	23	M33x2	40	72	63	18	79.5	50	55	41	722	250
	KDXFV-1CM-45-42WD	35	29	M42x2	50	81	69	20	90.5	60	65	50	1053	250
S	KDXFV-1CM-52-48WD	42	29	M48x2	55	82	68.5	22	91	65	70	60	1563	250
	KDXFV-1DM-14-12WD	06	3.5	M12x1.5	17	38.5	31.5	12	46	19	19	17	70	420
	KDXFV-1DM-16-14WD	08	3.5	M14x1.5	19	38.5	31.5	12	46	19	19	19	76	420
	KDXFV-1DM-18-16WD	10	5.5	M16x1.5	22	45.5	38	12	54	22	24	22	124	420
	KDXFV-1DM-20-18WD	12	7.5	M18x1.5	24	48.5	41	12	57	24	27	24	157	420
	KDXFV-1DM-22-20WD	14	9.5	M20x1.5	26	52.5	44.5	14	62	27	32	27	215	420
	KDXFV-1DM-24-22WD	16	11	M22x1.5	27	55	48	14	66	32	36	30	296	420
	KDXFV-1DM-30-27WD	20	15	M27x2	32	61	52	16	73.5	41	50	36	621	420
	KDXFV-1DM-36-33WD	25	19	M33x2	40	67	54.5	18	78.5	46	55	46	648	420
	KDXFV-1DM-42WD	30	24	M42x2	50	78	64	20	90.5	60	60	50	1178	250
	KDXFV-1DM-52-48WD	38	29	M48x2	55	86	69.5	22	100	65	70	60	1627	250

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如 KDXFV-1CM-30-26WD /RN。

Note: In case if you are interested to order the head adapter in complete set with cutting

ring and nut, it is necessary to insert

suffix “RN” after our part NO, for example KDXFV-1CM-30-26WD /RN


注释/ANNOTATIONS

可根据客户要求设计符合要求的各种非标阀 Special design and development are available

单向阀

KDXFZ-1CM-WD/KDXFZ-1DM-WD


/ Dimension

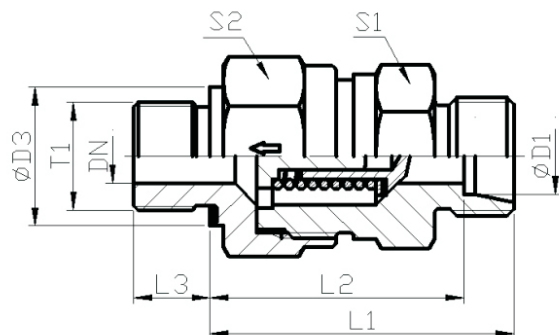

公制 螺纹-ED密封 METRICMALE-EDSEAL

公制外螺纹-ED密封 (ISO997) /EO24° 锥
METRICMALE-EDSEAL (ISO997) /24° CONE

/I nstallation

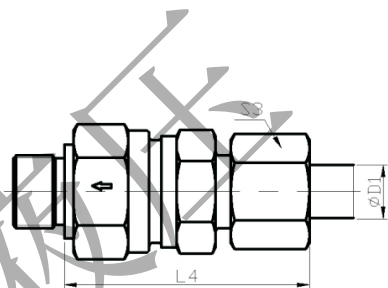

订货型号 OrderCode

系列 SERIES	代号 PARTNO.	D1	DN	T1	D3	L1	L2	L3	L4	S1	S2	S3	重量(g) WEIGHT	工作压力 WORKING PRESSURE (bar)
L	KDXFZ-1CM-12-10WD	06	3.5	M10X1	14	33.5	26.5	8	41	17	17	14		400
	KDXFZ-1CM-14-12WD	08	5.5	M12X1.5	17	35.5	28.5	12	43	19	19	17		400
	KDXFZ-1CM-16-14WD	10	7.5	M14X1.5	19	45.5	38.5	12	53	22	24	19		400
	KDXFZ-1CM-18-16WD	12	9.5	M16X1.5	22	47.5	40.5	12	55	27	30	22		400
	KDXFZ-1CM-22-18WD	15	11	M18X1.5	24	49.5	42.5	12	57.5	27	32	27		400
	KDXFZ-1CM-26-22WD	18	14	M22X1.5	27	55.5	48	14	64	36	41	32		400
	KDXFZ-1CM-30-26WD	22	18	M26X1.5	32	63.5	56	16	72	41	46	36		250
	KDXFZ-1CM-36-33WD	28	23	M33X2	40	71.5	64	18	80.5	50	55	41		250
	KDXFZ-1CM-45-42WD	35	29	M42X2	50	80.5	70	20	91.5	60	65	50		250
	KDXFZ-1CM-52-48WD	42	29	M48X2	55	81.5	70.5	22	93	65	70	60		250
S	KDXFZ-1DM-14-12WD	06	3.5	M12X1.5	17	38.5	31.5	12	46	19	19	17		420
	KDXFZ-1DM-16-14WD	08	3.5	M14X1.5	19	38.5	31.5	12	46	19	19	19		420
	KDXFZ-1DM-18-16WD	10	5.5	M16X1.5	22	45.5	38	12	54	22	24	22		420
	KDXFZ-1DM-20-18WD	12	7.5	M18X1.5	24	48.5	41	12	57	24	27	24		420
	KDXFZ-1DM-22-20WD	14	9.5	M20X1.5	26	51.5	43.5	14	61	27	32	27		420
	KDXFZ-1DM-24-22WD	16	11	M22X1.5	27	54.5	46	14	64	32	36	30		420
	KDXFZ-1DM-30-27WD	20	15	M27X2	32	60.5	50	16	71.5	41	50	36		420
	KDXFZ-1DM-36-33WD	25	19	M33X2	40	68	54.5	18	78.5	50	55	46		420
	KDXFZ-1DM-42WD	30	24	M42X2	50	77.5	64	20	90.5	55	60	50		250
	KDXFZ-1DM-52-48WD	38	29	M48X2	55	87.5	71.5	22	102	65	70	60		250

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如KDXFZ-1CB-30-12WD/RN。
Note: In case if you are interested to order the head adapter in complete set with cutting ring and nut, it is necessary to insert suffix “RN” after our part NO, for example KDXFZ-1CB-30-12WD/RN.

注释/ANNOTATIONS

可根据客户需要设计符合要求的各种非标阀 Special design and development are available